



透水井戸

一箇所当たりの雨水処理量が大きく、工場や公共施設及び宅地内において有効です。
縦に深く設置され、かつ全断面で浸透するので透水性の良い地層がある場合、有効に機能します。


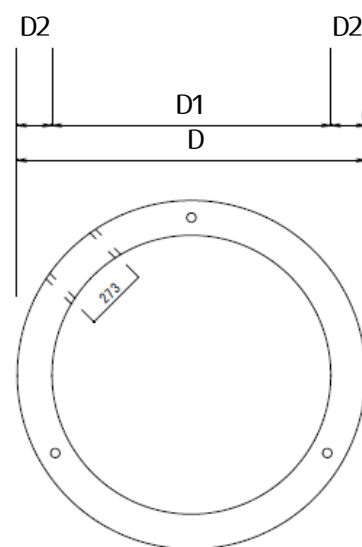


井戸
本体

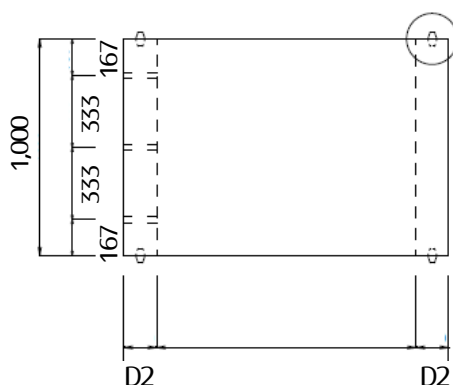

呼び名	D	D1	D2	参考重量 (kg)	価格(円)
900	1,200	900	150	1,044	102,000
1200	1,500	1,200	150	1,341	134,000
1500	1,800	1,500	150	1,649	169,000
2000	2,500	2,000	250	3,730	364,000

底塊
リング

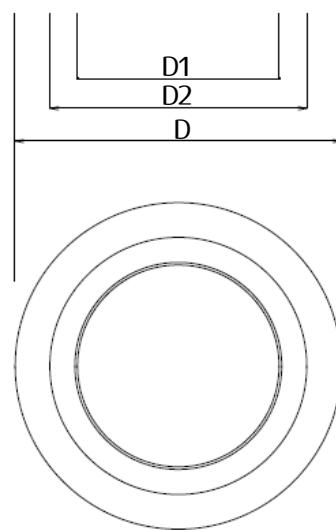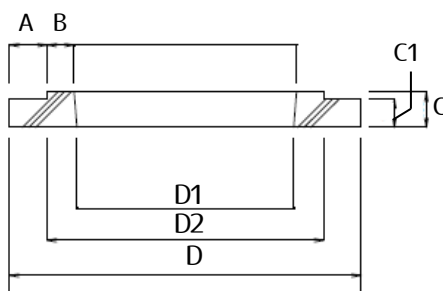

呼び名	D	D1	D2	A	B	C	C1	参考重量 (kg)	価格(円)
900	1,250	650	880	185	115	150	120	288	28,000
1200	1,500	950	1,180	160	115	150	120	349	34,000
1500	1,850	1,250	1,480	185	115	150	120	477	45,000
2000	2,500	1,650	1,970	265	160	250	200	1,543	169,000

